

43 inch Floor Mount Non-Touch 2GB/16GB T29942



FEATURES

- **Metallic Body Appearance**
Light weight body with integrative design. The front high-transmittance tempered glass provides reliable protection.
- **Variable Materials**
Static and dynamic materials, including pictures, audio, video, scrolling subtitle, PDF, webpage, live video, pop-up pictures, etc.
- **Flexible Program Schedule**
 - Free schedule and district display of multiple material.
 - Multiple play modes with customization support.
- **Centralized Management**
 - Remotely control and manage one or more screens, such as timed startup / shutdown, quick startup / shutdown, brightness / volume timed adjustment, and screenshot preview.
 - Remote program release and local (USB) program update.
- **Organization Permission**
 - 5-level organization available for managing materials, programs, terminals, and users.
 - Create custom user with precise permission assignment. Multiple permission templates available.
- **Multiple Security Safeguards**
 - 3-level check of materials, programs, and schedules to prevent mistake release. Screensaver password to protect displaying.
 - Encryption of data storage and transmission to avoid data tampering.
 - With no default password, users can activate and set initial password to guarantee the password safety.
 - DSS Management Software to manage <200pcs DSS Players



Ultra HD



Viewing Angle



Android OS



Remote Access




Power Saving

Technical Specification

Model	T29942
Android OS	11
Motherboard	Amlogic t982
Diagonal Size	43 inch
Resolution	2160 x 3840
Aspect Ratio	16:9
Pixel Pitch	0.246mm x 0.246mm
Brightness (cd / m2)	350 cd / m2 (± 10%)
Display Area	954 (W) x 533 (H)
Display	
View Angle	H: 178° V: 178°
Response	8ms
Contrast Ratio	1200:1
Color	16.7 Million Color
Audio	
Speaker	2 x 8Ω, 10W
Built-in System	
CPU	ARM 4 x Cortex-A55 @2.02GHz, Mali-G52 GPU
RAM	2GB LPDDR4
Storage	16GB EMMC (Insert SD card up to 64 for expand internal storage)
Network Interface	LAN 1000M, Wi-Fi 2.4G, 1*Bluetooth

I/O Port	1*1000M LAN, 1*TF card, 2*USB, 1*miniUSB-OTG,1*Earphone
Power Input	AC 100~240V~ / 2~5A / 60-50Hz
Function Features	
Maximum Resolution	Support 4K display
Media Format	Video: RM, RMVB, MKV, TS, FLV, AVI, VOB, MOV, WMV, Mp4 Picture: JPG, BMP Audio: MP3, WMA, APE
Free Split Layout	Split the monitor to several area to display video, picture, text etc
Network Management	Yes
Multiply Play Mode	Schedule, Broadcasting, Cycle play etc
Firmware	Update firmware by network or USB disk
Energy Saving	LED backlight to save 50% power consumption
Time On / Off	Auto power on or off by setting timer
Remote Control	Play, Pause, Stop, Restart, Shutdown etc.
Readable	Frosted LCD screen for readability at high light condition
General	
Body Material	Aluminum Frame, Metal body
Glass	4mm , MOHS 7 Grade Tempered Glass, Explosion Proof
Life	60,000hrs @ 100% duty cycle
Temperature	Work : 0°C ~ 50°C ; Storage : -20° ~ 60°C
Humidity	Work : 10% to 90% (Non Condensing) Storage : 0 to 95% (Non Condensing)
Noise	Working < 25 dBA
Consumption	Max ≤ 150W; Standby ≤ 1W
Product Dimension	Body : 610 (W) x 1755.3 (H) x 89 (D)mm Floor Stand Set :620 (W) x 45(H) x 450(D)mm
Accessories	Quick Start Guide, Remote Controller, Power Cord

Dimension :

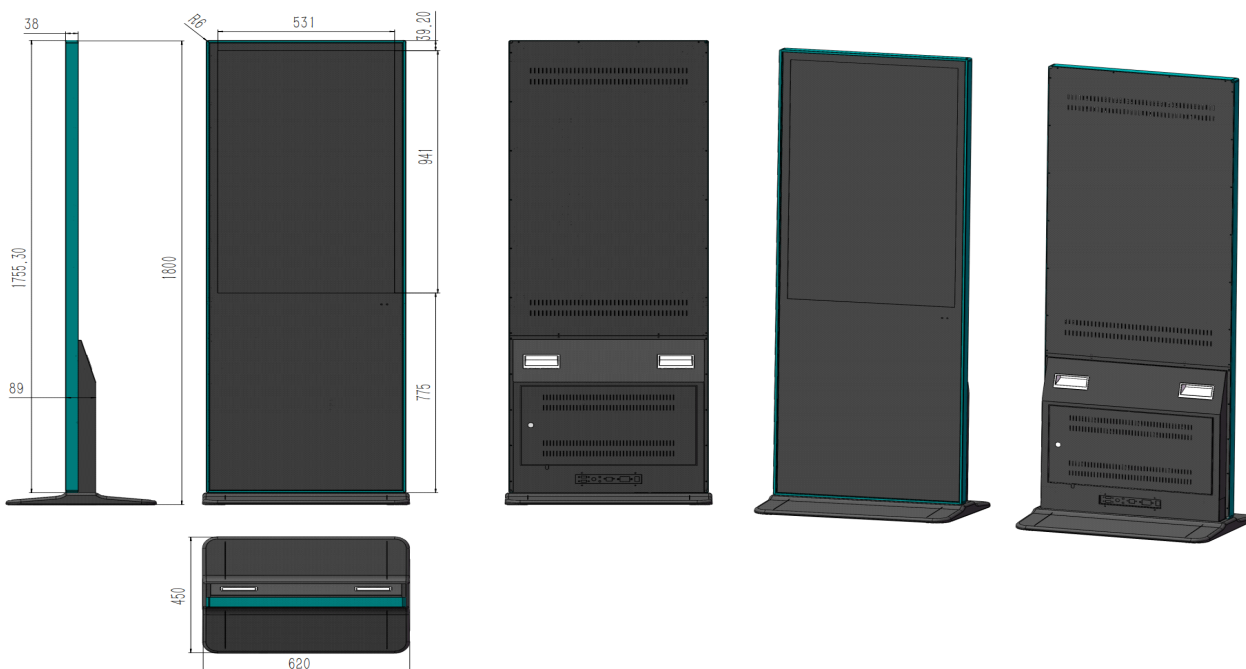

* Note: we will not inform the modify or upgrade of products.