


IP POE SMART 5MP ATC DOME CAMERA

ONVIF®



FEATURES

- 5260 x 1440 Resolution
- All Time Color Vision
- Built-in High Sensitivity Mic
- Power Input : POE 48V Standard/ DC 12V 1Amp
- Support ONVIF protocol
- 4KV lightning protection
- Compression: H.264/H.265/H.264+/H.265+

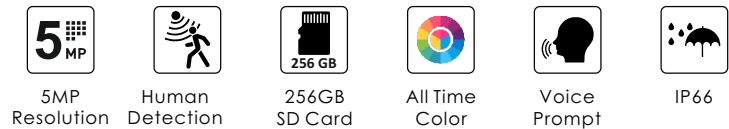

Technical Specifications

Product Code	T18187-A
Image Sensor	1/3" GC4653 CMOS Sensor
S/N Ratio	> 39.1 dB
Resolution	2880 x 1620
Minimum Illumination	Color: 0.1 Lux, B/W: 0.01 Lux
Lens	4 MM
LED	4 Half White LED & 4 Half IR LED
IR LED Range	20 Meters
White LED Range	15 Meters
Light Mode	Full Color / Infrared / Smart
OSD	Date Time & Title
White Balance	Auto
Day & Night	Auto / Color / BW
Noise Reduction	Support 2D / 3D Noise Reduction
Mirror/Flip	On / Off
Privacy Masking	4 Zone Selectable
Video Streaming	Dual Streaming at the Same Time: H.264 / H264+ / H.265 / H.265+; Main Stream: 2880 x 1620@15fps Sub - Stream:800 x 448@15fps
Audio Streaming	G.711Codec Standard, Support Audio and Video Synchronization
Connectors	Rj45 / DC Input

Power Input	POE RJ45 input 48V Standard/DC Input 12V – 1A
Power Consumption	≥3W
Lightning Protection	4000V Lightning Protection
Operation Temperature/Humidity	-10°C to +50°C / 30% to 80% RH
Storage Temperature/Humidity	-20°C to +60°C / 20% to 90% RH
Housing Type	Plastic
Dimensions	(H)97 x (W)108.4 x (L)108.4mm

Similar Products



Smart 3MP 4G
Cube Camera



Smart 3MP 4G Robot
Camera



Smart 3MP 4G
Dome Camera



Smart 3MP 4G
Mini PT Camera



Dual Lens 4G
PTZ Camera