

55 Inch KIOSK with Touch 2GB 16GB T29994-A



Information can be broadcast, news released, products advertised, etc., digital signage, which is widely used in the fields of entertainment, finance, and traffic.











Ultra HD

Viewing Angle

Android OS

Remote Access

Power Saving

Technical Specification

Model

Diagonal Size55 inchResolution3840 x 2160Aspect Ratio16:09

Pixel Pitch 0.315mm \times 0.315mm \times 0.315mm Brightness(cd/m2) 350 cd/m2 (\pm 10%) Display Area 1213(W) \times 684(H)

Display

View Angle H: 178° V: 178°

Response 8ms
Contrast Ratio 1200:1

Color

Audio

Speaker $2 \times 8\Omega$, 10W

Touch Features

Touch type Infrared touch, 10 points touch

Transmittance > 92%
Touch precision ≥ 2MM

Touch Object All Opaque object, such as finger, pen etc.

MTF 60 Million touch by each points

Minimum touch object ≥ 2MM

Anti Light Incandescent lamp (220V, 100W) distance > 350mm,

Sunlight illumination <90000Lux

Built-in System

Android OS 11

CPU Amlogic T982/ Quad Core

RAM 2GB

Storage 16GB

Interface

Network Interface LAN 1000M, WIFI-2.4G, BT-4.1

I/O Port 1 x USB 3.0, 1 x USB-OTG, 1 x LAN, 1 x HDMI 2.0 4K out, 1 x TF, 1 x EP

Power Input AC 100~240V~/ 2~5A/ 60-50Hz

Function Features

Maximum Resolution Support 4K display

Media Format Video: RM, RMVB, MKV, TS, FLV, AVI, VOB, MOV, WMV, MP4,

Picture: JPG, BMP, Audio: MP3, WMA, APE

Free Split Layout Split the monitor to several area to display video, picture, text etc

Network Management Yes

Multiply Play Mode Schedule, Broadcasting, Cycle play etc
Firmware Update firmware by network or USB disk
Energy Saving LED backlight to save 50% power consumption

Time on/off

Auto power on or off by setting timer

Remote Control

Play, Pause, Stop, Restart, Shutdown etc.

Readable Frosted LCD screen for readability at high light condition

General

Body Material Aluminum Frame, Metal body

Glass 4mm, MOHS 7 Grade Tempered Glass, Explosion Proof

Life 60,000hrs @ 100% duty cycle

Temperature Work: 0°C ~ 50°C; Storage: -20° ~ 60°C

Humidity Work: 10% to 90% (Non Condensing)

Storage: 0 to 95% (Non Condensing)

Noise Working < 25 Dba

Consumption Max: ≤ 150W; Standby: ≤ 1W

VESA Mount point mm 300 x 300


Product Dimension Body:1260.1mm (W) x 731.1mm (H) x 62.8mm(D)

K Stand Dimension 340mm (W) x 1024.8mm (H) x 420mm (D)

Accessories Quick Start Guide, Remote Controller, Power Cord, K Stand.

Product Dimension:

K Stand Dimension:

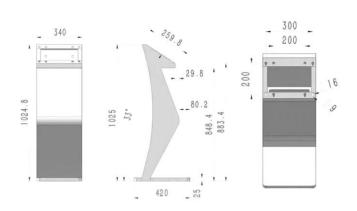

^{*} Note: we will not inform the modify or upgrade of products.